

WS888 Water-Soluble Pb-Free Solder Paste

Introduction

WS888 solder paste is an environmentally stable water-soluble Pb-free solder paste. WS888 has excellent shelf and stencil life, and responds well to pauses in printing. WS888 is also halide free.

Attributes

- Long stencil life of 8 hours.
- Excellent printing after pauses of up to 4 hours.
- Halide free.

Solder Alloy	Solder Powder Size Availability (IPC J-STD-005B)	Melting Range (°C)
SAC305	Type 3 or 4	217 - 220
Sn/Ag 3.5%	Type 3	221
SN100C* (Sn/0.7Cu/Ni/Ge)	Type 3 or 4	227
SN100CV* (Sn/1.5Bi/0.7Cu/Ni/Ge)	Type 3 or 4	221 - 225
LF-C2* (Sn/3.5Ag/3Bi/1Cu)	Type 3 or 4	208 - 213
Anti-tombstoning mixtures	Type 3 or 4	Range depends on the mixture

- Other sizes of solder powder are available upon request.
- *Alloy from Nihon Superior.

Solder Paste Packaging	Net Weight (grams)
Jars	500
Cartridges	500-600 (6 oz), 700 (8 oz), 1200-1300 (12 oz)
Syringes	30 (10 cc), 100 (30 cc)

- Other packaging may be available upon request.

Compatible Products

150N, 152N, 159HF liquid fluxes.
WS888 gel flux.

Storage and Handling

Best practices for storage and handling of solder paste are listed below. Additional details can be found in the Solder paste storage and handling guide.

- Shelf life is 9 months when stored at 0 to 10 °C (32 to 50 °F).

- Warm the solder paste to room temperature (18 to 29 °C / 65 to 85 °F) before use. Do not force warming by heating the solder paste. Keep the solder paste sealed while warming, which typically takes 3 to 4 hours at room temperature. Warming overnight is acceptable.
- Ideally solder paste should be mixed before use to bring it to a normal working consistency. This can be done by hand-stirring in a jar, or using a knead cycle on the printer.
- Best practice is to keep the solder paste at room temperature until completely used. Remaining fresh solder paste should be sealed in the original container along with all inserts, lids, etc.
- If solder paste is removed from the printer and stored, it is recommended to store it in a separate container from the fresh solder paste. The container should be sealed with all inserts, lids, etc.
- Once solder paste is applied to the circuit board, the best practice is to reflow the solder paste as soon as possible. It is acceptable to reflow within approximately 8 hours.

Process Parameters

The print and reflow process parameters shown below are simply guidelines. The optimal parameters may be different based upon your equipment, circuit boards, components, and process.


Print Parameter	Guideline	Notes
Solder paste bead size	1.0 to 2.5 cm (0.40 to 1.0 in)	Add solder paste regularly to maintain the bead size.
Squeegee blade	Stainless steel. 60° from horizontal. 45° for pin in paste.	Other blade angles and materials are usable.
Stencils	Fine grain laser cut stainless steel	All types of commercially available stencils are usable.
Print speed	20 to 200 mm/sec (0.8 to 8.0 in/sec)	Increased speeds may require higher blade pressures.
Pressure / blade length (increase with increasing speed)	0.18 to 0.54 kg/cm (1.0 to 3.0 lbs/in)	Set to the minimum required to scrape the stencil clean.
Separation speed	0.5 to 10.0 mm/sec	Higher separation speeds may improve solder paste release.
Underside stencil cleaning	Wet / vacuum / vacuum cycle every 1-20 prints	Clean more frequently to reduce the risk of bridging.
Stencil life	8 hours at 18-29 °C (65-85 °F) and 30-70% RH.	Stencil life may be shorter outside of these conditions.

- Higher blade pressures will increase stencil and blade wear and can lead to “scooping” and other print defects.
- Underside stencil cleaning is best accomplished with commercial cleaners and high-quality wipe materials. Nano-coated stencils can be used to reduce the frequency of underside cleaning.

Reflow Parameter	Guideline	Notes
Profile length (25 °C to peak)	3.0 to 5.0 min (180 to 300 sec)	Profile length is dependent upon the PCBA and process.
Heating ramp rate	1.0 to 3.0 °C/sec	Lower ramp rates tend to equalize reflow temperatures.

Preheat / soak time (150 - 200 °C)	30 to 120 sec	Linear profiles are a good starting place but may not work for all PCBAs.
Peak temperature	235 to 250 °C for SAC alloys	15 to 30 °C above liquidus for other solder alloys.
Reflow time (time above liquidus)	30 to 90 sec	Time above the liquidus point of the solder alloy used.
Cooling ramp rate	1.0 to 6.0 °C/sec	Higher cooling rates may refine the grain structure.

Examples of reflow profile graphs are shown below.

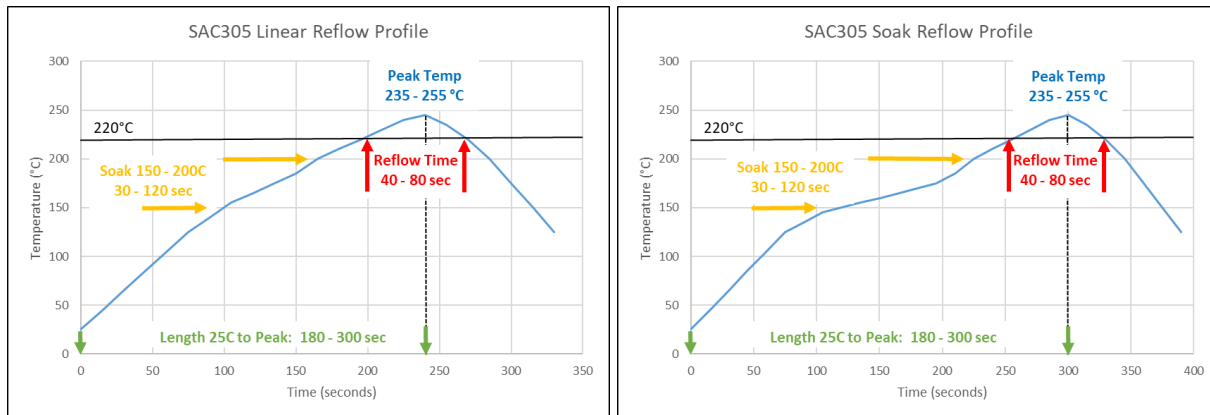

Cleaning

Raw solder paste can be removed from the stencil, squeegee blades, and circuit boards using a variety of commercial cleaners. Isopropyl alcohol (IPA) can also be used.

WS888 flux residues are corrosive and must be removed using a suitable wash process. It is recommended to remove WS888 flux residues within 4 hours after soldering using D.I. water heated to 100 - 180 °F in standard washing equipment. It is possible to wash away WS888 flux residues after multiple heat cycles followed by a 24 hour hold time, although this is not recommended.

Safety

Wear chemically resistant gloves when handling solder paste. Avoid breathing fumes, especially during reflow of the solder paste. Follow the guidelines detailed in the Safety Data Sheet (SDS).

J-STD-004C Flux Standard	Test Method	Result
J-STD-004C classification	J-STD-004C methods	ORH0
Halide ion content (Br ⁻ , Cl ⁻ , F ⁻ , I ⁻)	IPC 2.3.28.1	0.0 % wt
Halogen content (Br and Cl)	EN 14582, IPC 2.3.28.1	5.3 to 5.7% wt of solids
Halide by silver chromate	IPC 2.3.33	No halides detected
Fluoride by spot test	IPC 2.3.35.1	None detected

Copper mirror	IPC 2.3.32	High activity
Copper corrosion	IPC 2.6.15	Corrosion present
Surface Insulation Resistance (SIR)	IPC 2.6.3.7	Pass > 1.00E+08 ohms
Electro Chemical Migration (ECM)	IPC 2.6.14.1	Pass, increase of 1.5 Log ₁₀ ohms
J-STD-005A Solder Paste Standard	Test Method	Result
Viscosity - Brookfield	IPC 2.4.34	Refer to the C of A
Slump - frosted glass	IPC 2.4.35	Pass
Solder balling - frosted glass	IPC 2.4.43	Acceptable
Wetting - copper	IPC 2.4.45	Pass

Limited Liability and Warranty Disclaimer

All information, statements, technical data, and recommendations contained in this Technical Data Sheet are based on testing we believe to be reliable. However, the accuracy or completeness thereof is not guaranteed. It is impossible for our lab to account for all manufacturing conditions and variables. Products are warranted to be free from defects at the time sold. To the full extent consistent with applicable law, the exclusive remedy of the user or buyer is to receive replacement product for any product defective at the time sold. FCT Assembly, Inc. makes NO WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Further, FCT Assembly, Inc. makes no other express, implied, or statutory warranties unless otherwise specified in writing and signed by officers of the corporation.